

# USER MANUAL

## KVM HDMI 4X1 Quad Multi-Viewer

### Product Introduction

- Allows 4 different HDMI devices (computer, laptop, DVD player, console, etc.) to be displayed on the same screen (TV, monitor, projector) simultaneously. Also allows 4 computers to use 4 USB devices: mouse, keyboard, flash drive, etc. You can switch by pressing the button.
- 5 display modes provide additional variety in display options. Transmit HDMI signals up to 100 feet without loss of image quality. Plug and play, no drivers required.
- USB Switch: Supports 2 modes - USB Sync Mode: USB device works on 4 computers at the same time; Switch Mode: USB device works on any computer at a time. Switching method: keyboard - hot key. The package comes with 4pcs USB A to TYPE-C cable (for use between computer and USB switch).
- Supported video resolutions - 1080P (60Hz and 30HZ)/1080i/720p/576p/576i/480p/480i; Supported audio formats - PCM 2.0, not supported: Dolby Digital and DTS; USB 2.0.
- Support remote control, such as seamless full-screen switching, sound switching, resolution selection, and PC selection.
- Support hotkey function. It only supports Ctrl+Shift mode.

1


### Connection Diagram:



Note: Please insert the keyboard into the designated USB port so as not to affect the hot key function of the keyboard.

2

### Function Indication:

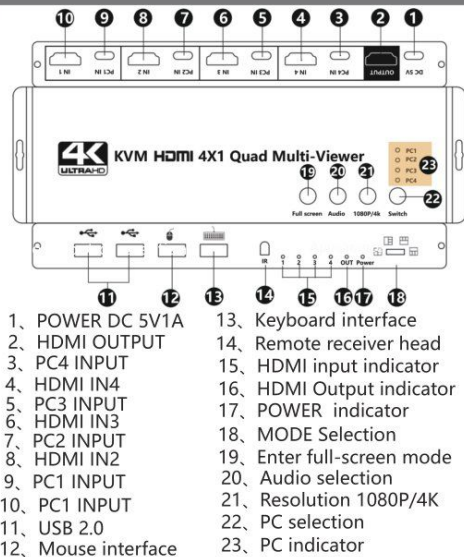

- POWER DC 5V1A
- HDMI OUTPUT
- PC4 INPUT
- HDMI IN4
- PC3 INPUT
- HDMI IN3
- PC2 INPUT
- HDMI IN2
- PC1 INPUT
- PC1 INPUT
- USB 2.0
- Mouse interface
- Keyboard interface
- Remote receiver head
- HDMI input indicator
- HDMI Output indicator
- POWER indicator
- MODE Selection
- Enter full-screen mode
- Audio selection
- Resolution 1080P/4K
- PC selection
- PC indicator

3

### Detailed Description:

#### Button function details:

Full screen Key:

When the device is in split mode, press this key to enter full screen mode. Audio and USB follows synchronously.

Audio Key:

In split mode, press this key to select the current signal source that needs to send audio.

1080p/4k Key: Press this key to select the current video resolution.

Switch Key:

In split mode, press this key to switch the mouse, keyboard, U disk, printer, etc. on the USB to the PC that needs to be operated, and the above indicator light will also indicate which PC your USB interface device is currently using.

#### Hotkey function introduction:


- Switch to the next PC: Press the Ctrl key twice quickly (Ctrl+ +Ctrl)
- Switch to PC1/PC2/PC3/PC4: Hold down the Ctrl and Shift keys at the same time, then press the 1/2/3/4 keys (Ctrl+Shift+1/2/3/4)
- To disable/enable the hotkey function: Hold down the Ctrl and Shift keys at the same time, then press the K keys (Ctrl+Shift+K)

Note: This product's hotkey combination mode only supports Ctrl+Shift combination.

4

### Other Instructions

#### Remote control function introduction:



- Turn the device on/off
- Full screen 1/2/3/4 source switching
- Screen up/down in split mode
- Select PC
- Audio selection
- Split mode selection
- 1080P/4K resolution selection

#### Accessories:

- KVM Quad Multi-Viewer X1
- Power supply 5V1AX1
- USB TO TYPE-C 2.0 data cable X4
- User Manual X1

Shell material: high quality aluminum alloy  
Color: Black

#### Appearance size:

- Length \* Width \* Height: 227\*68\*25(mm)
- Weight: 323g

Reminder: Please pay attention to the use environment. Please do not open the case to avoid damage to the product. All ports should be in good contact, otherwise the use effect will be affected. Please unplug the power supply if not used for long.

5