


Product Schematic

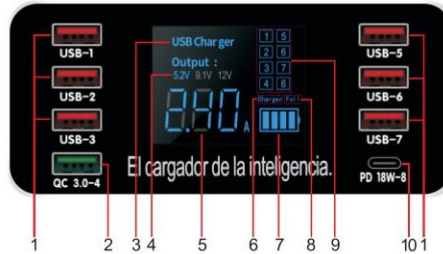

1. USB5V / 1A-2.4A output interface
2. OC3.0 fast charge interface
3. Display the local charging name
4. Display device charging voltage
5. Display device charging current
6. Display device charging
7. Display device charging prompt
8. Display device overload notification
9. Display device charging interface
10. Type-C (PD4.0+QC) 18W fast charge interface

Product Manual

Thank you very much for purchasing the USB smart charger this time. Please read carefully before using this product. Keep this manual in a safe place for future reference.

Product Feature:

- (1) 8 USB ports (6 normal charging ports, 1 QC3.0 fast charging port, 1 Type-c charging port), it can charge up to 8 devices with 5V input voltage. The normal charging port can support up to 2.4A current. The Fast Charge 3.0 ports are 5V3A, 9V2A and 12V1.5A (according to the smart adjustment of QC3.0-enabled mobile phones).
- (2) The display can display the real-time current and voltage of each port.
- (3) Built-in intelligent protection system: over-voltage, over-heat, over-current protection, effectively prevent accidents. Stable and safe.
- (4) the C-type port is 5V/1A-3A, C-type [PD] port 18W (5V3A, 9V2A, 12V1.5A) C-type port is 5V/1A-3A, C-type [PD] port is 18W (5V3A, 9V2A, 12V1.5A)

Product parameters:

- | | |
|---|---|
| 1. Color: ceramic white or black rubber | 6. Power cord length: 1.2 meters |
| 2. Input voltage: AC 100~240V, 50~60Hz | 7. Bare metal size: 138*75*50mm |
| 3. Total output voltage: DC 5V / 8A / 40W (maximum) | 8. A9 total output voltage: 8A / 40W |
| 4. QC3.0 output: 5V 3A, 9V 2A, 12V 1.5A | 9. A9 + total output voltage: 8A / 40W |
| 5. Type-c output: 5V 3A | 10. A9P total output voltage: 12A / 60W |

Warranty Content:

1. The warranty scope of the products produced by the company for the company;
2. All products of the company are guaranteed for one year from the date of sale;
3. Failures caused by the normal use warranty period can be submitted to the company for after-sales service according to the terms of this warranty;
4. The reasons for product damage are as follows, the company does not provide warranty service;
 - 4.1. Forging and copying the company's products;
 - 4.2. Accidental factors or man-made damage;
 - 4.3. Man-made damage, water ingress, mechanical damage, damage, personal dismantling, etc.;
 - 4.4. Appearance wear and scratch deformation;
5. The company will retain the final interpretation right;

Matters needing attention

1. The charger is 8A 40W, the current 1A mobile phone can charge 8 sets at the same time, 1.5A can charge 5 at the same time, each mobile phone current is different as long as it does not exceed 8A total current, it can be used normally, more than 8A total current, The charger will be in overcurrent protection state, the screen will flash (the charger will stop working), then unplug the data cable to reduce the charging device, disconnect the charger power supply, automatically reset in about 5 minutes, re-plug it and resume normal use.
2. Do not disassemble, do not store in a high temperature environment above 45 °C or in a fire, do not put moisture or put into the water.
3. Do not apply external force or drop it from a height.